



Faucet Care and Maintenance Guide

**Answers to frequently asked questions on how
to keep your Castle Bay faucets at their best**

Castle Bay faucets are engineered
for superior performance inside and out.



Flush the plumbing system before installing the faucets

Over time pipes can develop deposits of minerals and other debris in the pipes. In the case of remodeling, there can be other construction debris that can get caught in aerators and showerheads. It is very important to flush the pipes before installing the faucets. This is to avoid plumbing residues clogging the aerator, or possibly damaging the ceramic valves.

TO FLUSH A KITCHEN FAUCET:


- Remove aerator and black sealing gasket above it.
- Turn faucet handle(s) to full on hot and cold mixed position(s) and flush lines for two minutes before turning off water with handle(s).
- Replace aerator.



TO FLUSH A PULL-OUT/PULL-DOWN KITCHEN FAUCET

If the spray does not come out of the wand as you would expect:

- Shut off water supply under the sink.
- Unscrew the wand from the hose.
- Tap the screen in the wand to remove debris.
Note: Do not disassemble the wand.
- Screw the wand back onto the hose.

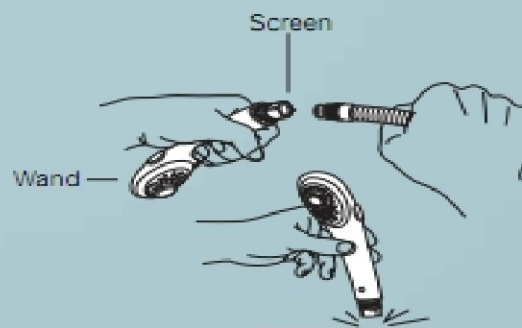

Care and Maintenance

Occasional cleaning with warm soapy water, followed by a polish with a soft cloth is all that is required. Dry with a soft cloth to retain luster and shine

Do not use proprietary abrasive liquids, powders, or pads to clean the faucet. This will void the warranty.

The aerator at the outlet of the spout may need occasional cleaning. To accomplish this unscrew the outlet and remove the aerator. Rinse thoroughly in clean water and re-install.



Bay
Castle